


Stryke-R1 Pistol Red Dot Sight

Features

1. Motion Awake Technology with 3 Reticles.
2. Offering 50000 hours of use based on 12 brightness levels.
3. 10 Daylight & 2 Night Vision compatible brightness settings.
4. IP67 waterproof.

Structure

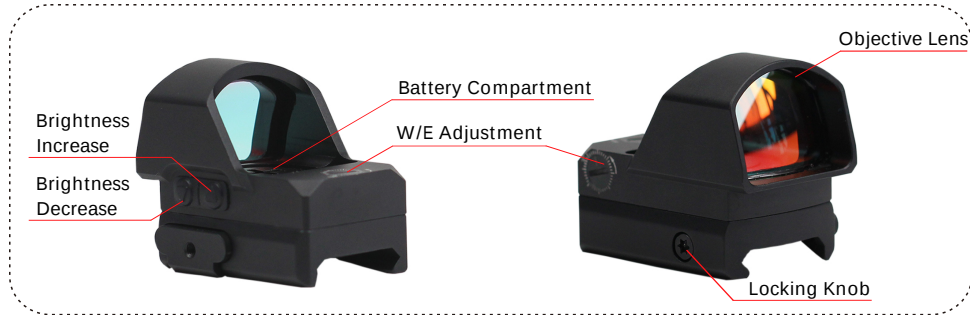


Specification

Stryke-R1	
Magnification	1X
Exit Pupil	28x20mm
Reticle	35 MOA Circle / 2MOA Red Dot
Parallax	Free
Material	Aviation Aluminum Alloy 6061T6
Dimension	46(L)*30.5(W)*39.15(H) /mm
Weight	72/42g(2.54/1.48oz)
Battery Type	1 * CR1632
Battery Runtime	50000 Hours
W&E Travel Range	110MOA
Adjustment per Click	1MOA
Working Temperature	-30°C ~ +60°C
Motion Awake	Yes
Waterproof	IP67

Delivery Sets

- ☒ Stryke-R1 ☒ Wrench ☒ Cleaning Cloth ☒ User Manual

Mounting

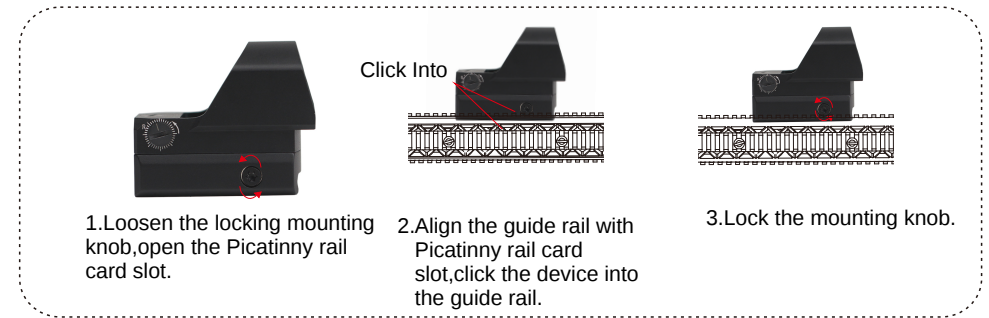

Operation

1. **Switch on:** Momentarily press either brightness button(" " "or" ") to turn on the Device.
2. **Power off:** Long press the " " button for 3 seconds to turn off the device.
3. **Brightness adjustment:** There are 12 settings for reticle brightness levels. Use " " "or" " to increase or decrease the brightness.
4. **Reticle selection:** Long press the " " button for will cycle between the 3 reticle choices.
5. **Motion Awake:** After turning on the device, if there is no action within 4 minutes, the device enters sleep mode. In sleep mode, shaking can wake up the device, and the reticle is consistent with before sleep.

Maintenance & care

This device is a precision instrument that deserves reasonablycautious care. The following tips are provided toensure a longproduct life. The optical lenses are multicoated optical glass. Whencleaning the lenses, blow awayany dust on the surface, wet the lenswith lens cleaner or clean water, then wipe away smudges with lentissue, soft cotton or a microfiber cloth. Avoid touching the glasssurface with dry cloth or tissue paper. Do not useorganic solventssuch as alcohol or acetone. No special maintenance is needed for thehousing surface. Do not tryto dismantle the device as the internalparts are specially cleaned and sealed and with an anti-fogtreatment. Any such attempt will void the warranty.